


# Blackmore Turbo/Needle/Gear Seeder Needle Cleaner Assembly - Installation

## Parts

Needle Cleaner Assembly w/ 90 ° hose barb  
1/4" NPT 90° street L

Pull the hose off the hose barb on the output side of the Low Pressure Adjust Block. Remove the block and remove hose barb. Replace the hose barb with the Needle Cleaner Assy so when the entire assembly is reinstalled on the machine the control valve is positioned as shown in the photo below. Reinstall the low pressure adjust block onto the machine as shown below, reconnect the hose.

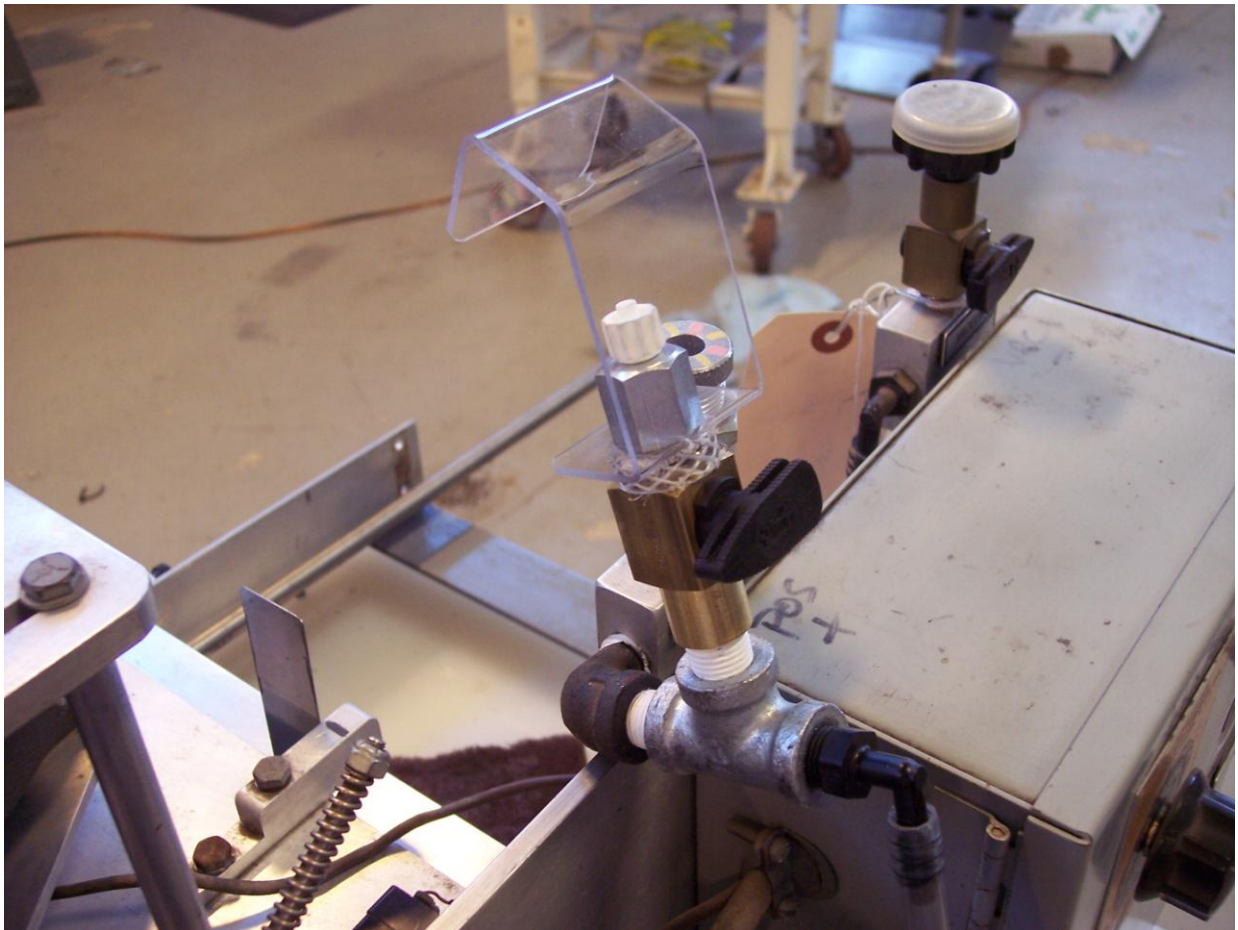

Any questions call Blackmore at (800) 874-8660



**Blackmore Company Inc.**

10800 Blackmore Avenue, Belleville, MI, USA 48111-2500

USA/Canada (800) 874-8660 • Int'l (734) 483-8661 • Fax (734) 483-5454 /2387

www.blackmoreco.com • email: info@blackmoreco.com

**August 2010**